

• **Hyundai i10**

Compatible with these Pioneer double DIN devices

Pioneer Navigation



Double DIN Kit contents

- (1) Mounting Frame
- (2) Facia Plate



1. Hyundai i10 with OEM head unit



2. Unclip carefully the center panel surrounding the OEM head unit




3. Remove the OEM center panel surrounding the OEM head unit




4. Remove the 4 screws (see arrows) fixing the OEM head unit

Remove the OEM head unit

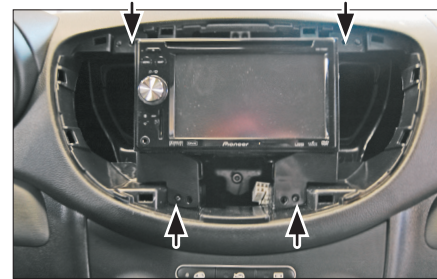

4. Mount the Double DIN Navigation to the Mounting Frame. Connect all required circuit points and place the Double DIN Navigation with the mounting frame on the dashboard. Fix it with the 4 original screws (see arrows)

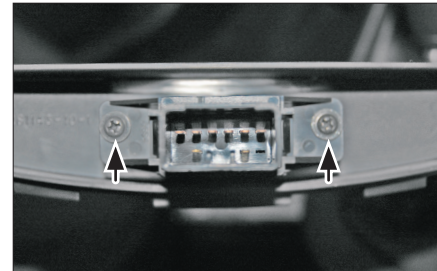

5. Remove the hazard switch fixed to the Hyundai i10 OEM head unit and fix it to the Facia Plate using the 2 original screws (see arrows)



6. Center panel with installed hazard switch



7. Connect the hazard switch plug with the hazard switch

Place the panel with the facia plate on the dashboard to finish installation