

Installation manual for:
Hyundai I30 2007 -->




Installation kit includes the following items:

- * 1X 2-ISO 100 mm. metal bracket
- * 1X Radio trim
- * 2X Mounting plates
- * 2X Mounting spacers
- * 4X Screws
- * 2X Radio keys

NOTE:


The assembling time of the kit will take approximately 1 - 2 hours.



Pioneer HD1BT

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 8 & 10 marked with an arrow.
Measured from left to right.



Pioneer Avic D3

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 8 & 10 marked with an arrow.
Measured from left to right.

* Mount the plates.



Remove the screws in the storage bin above the dashboard.
At the location of the arrows.



Remove the dashboard panel around the OEM radio.
Use a plastic wedge.



Remove the original radio.
This is tighten by four screws.



Cut off the end of the plastic frame and the metal plate that is circled(see photo).



Cut out the dimensions of the new headunit out of the OEM panel.

See cutting instructions last page.



Connect all of the needed wiring harnesses and check the connections carefully.

7



Place the metal bracket.

8



Place the new headunit.

9



Place the modified panel back,




Place the back the storage bin and place the new radio trim.

Connect all of the needed wiring harnesses and check the connections carefully.

Please read all the instructions very carefully.



Carefully cut the dimension that are listed below.

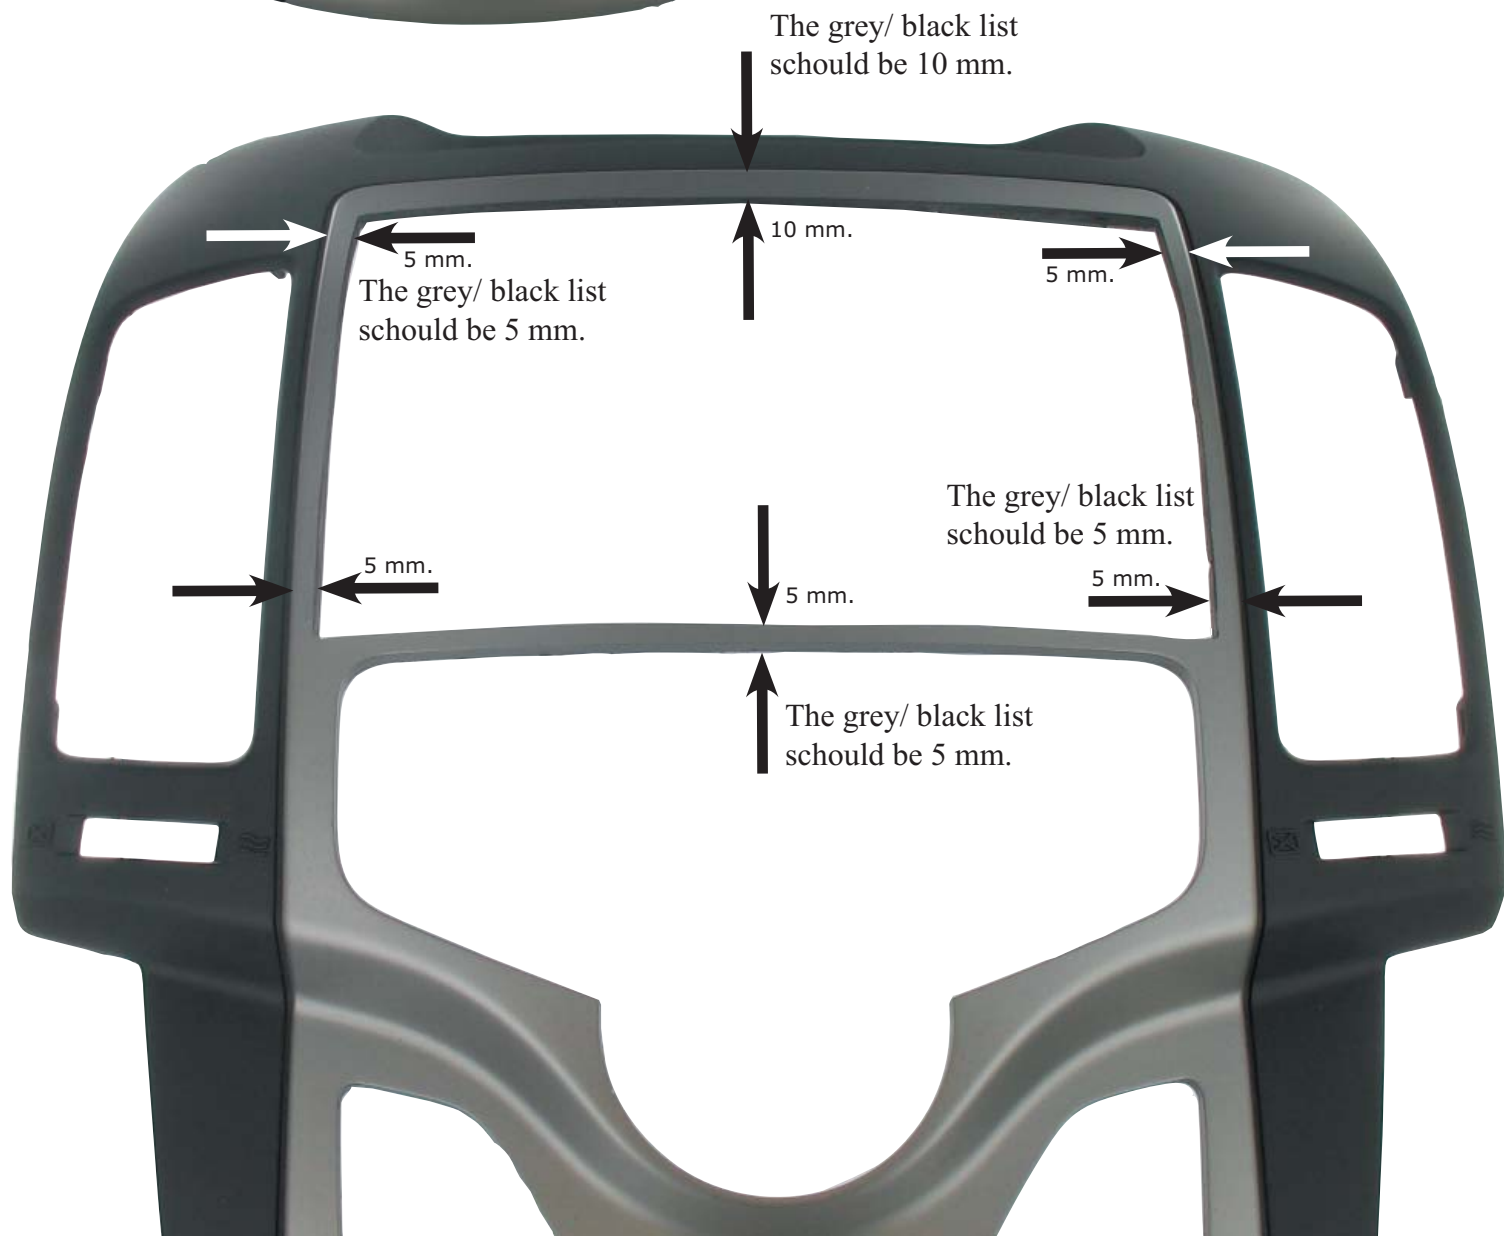

Please read all the instructions very carefully.