

Steering wheel control interface installation kit for:


SSANGYONG

Model: Korando with base audio;

Year: 2018>

Kit content: SWC RESISTIVE interface
wiring harness
radio adapter


Customer code: CA-R-SSK.003

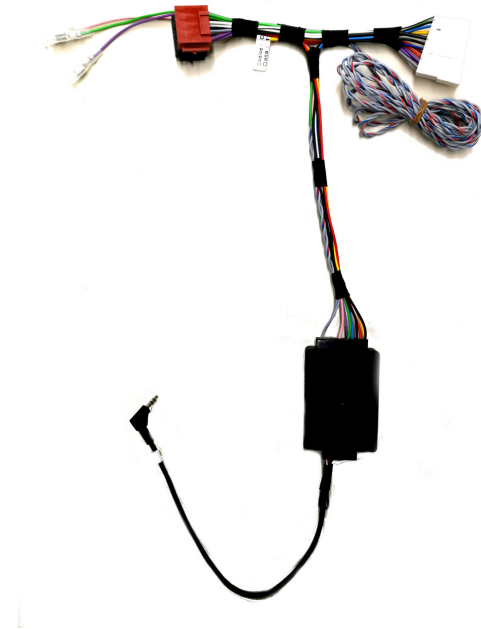

INSTALLATION MANUAL

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.
04/2018 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints. R1

All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.
04/2018 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

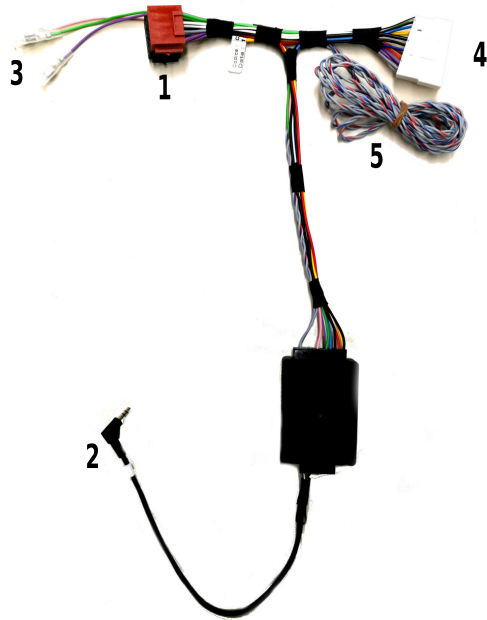

ATTENTION!



In order to prevent ESD damage, the WHEEL REMOTE JACK must be connected before plugging in the connectors on car side.

Connect cables to the radio side as follow:

- 1- to ISO CONNECTORS (black and red housings)
- 2- to WIRED REMOTE SOCKET (NOTE: do not connect to microphone socket)
- 3- to SERVICES (if required); functions are marked on the wires:
 - Green - Parking
 - Violet - Reverse
 - Pink - Speed

Connect cables to the car side as follow:

- 4- to CAR CONNECTOR
- 5- to VEHICLE'S OBD CONNECTOR as shown in the picture below:
- A Grey-Blue = Can-Low
- B Grey-Red = Can-High

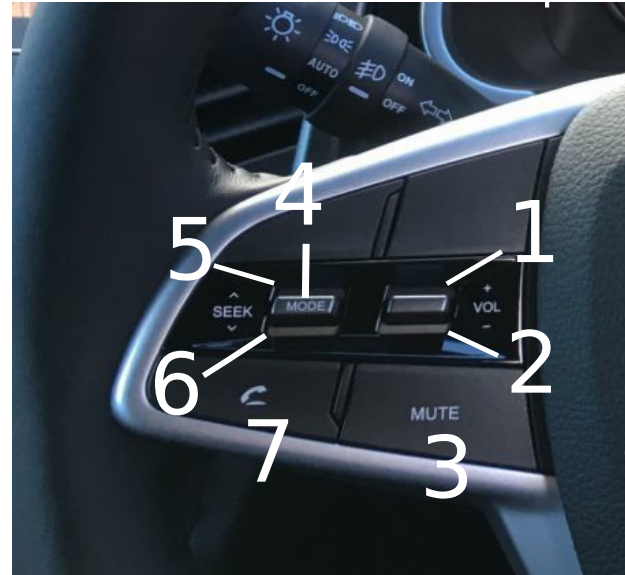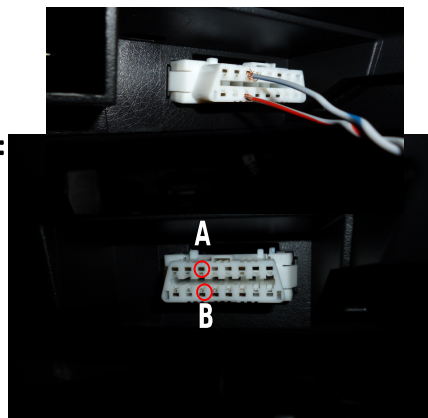

The steering wheel buttons perform the following functions (if supported by the radio):

- 1- Volume +
- 2- Volume -
- 3- Attenuate
- 4*- Short press > Source
Long press > Voice
- 5- Seek up
- 6- Seek down
- 7*- Short press> Accept incoming call
Long press> Rejet incoming call

* NOTE: depending on the radio model, the activation time of this function could take up to 3 seconds

cut along the dotted line - copy for the vehicle owner