



Installation manual for:  
**Suzuki Swift 2005 -->**



Installation kit includes the following items:



- \* 1X 2-ISO 100 mm. metal bracket
- \* 1X Replacement panel
- \* 1X Radio trim
- \* 2X Mounting plates
- \* 2X Mounting spacers
- \* 2X Radio removal keys
- \* 4X Screws
- \* 2X Cushion

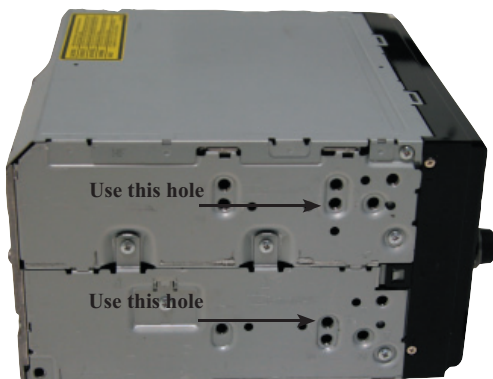

Pioneer HD1BT

We advice to use the following positions.  
Other positions are also possible.

Use position 1 marked with a cross.  
Use position 12 & 12 marked with an arrow.  
Measured from left to right.

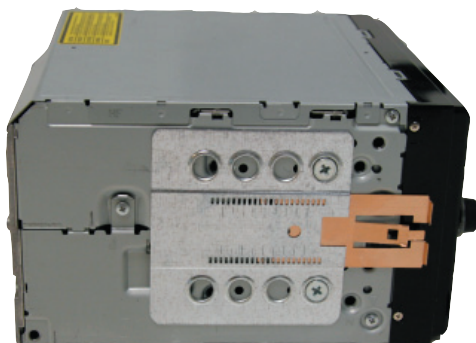

Pioneer Avic D3

We advice to use the following positions.  
Other positions are also possible.

Use position 1 marked with a cross.  
Use position 9 & 11 marked with an arrow.  
Measured from left to right.

\* Mount the plates.

1



Car is equipped with original head unit.

2



Remove dashboard cover under the steering wheel by pulling.

3



Remove glove compartment

4




Remove locknut from head unit. At drivers side underneath the dashboard.

5



Remove locknut from head unit. At passenger side underneath the dashboard.

6

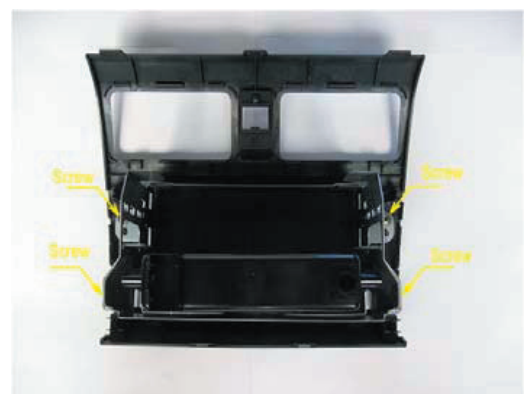

Remove complete panel. Remove 4 screws en disable metal bracket. Place back panel and connect all wiring.

Connect all of the needed wiring harnesses and check all connections carefully

6



Place metal bracket and place head unit.

7



Place back all panels in reverse order.  
Place plastic radio trim

Connect all of the needed wiring harnesses and check all connections carefully