



(sample photo)

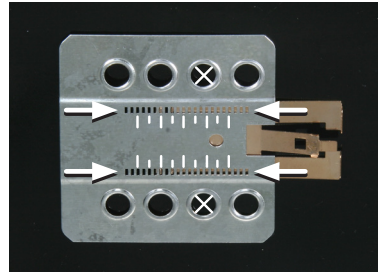

(sample photo)

Mount the metal brackets to the double DIN head unit.

The position of the copper coloured holder can be adjusted to your needs for perfect fit. (see sample)

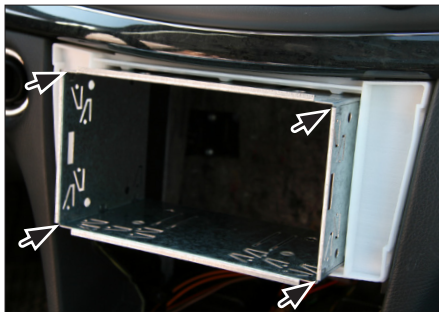

7. Push the metal frame into the mounting bracket

Connect all required circuit points
Push the Pioneer Navigation into the metal frame until it snaps in.



8. Push the facia plate onto the mounting bracket

Reinstall everything in reverse order to finish installation.



Installation Manual Double DIN Kit


Standard: 381190-28

Rubber-Touch: 391190-28

• Mercedes E-Class (W211)

Compatible with these Pioneer double DIN devices

Pioneer Navigation

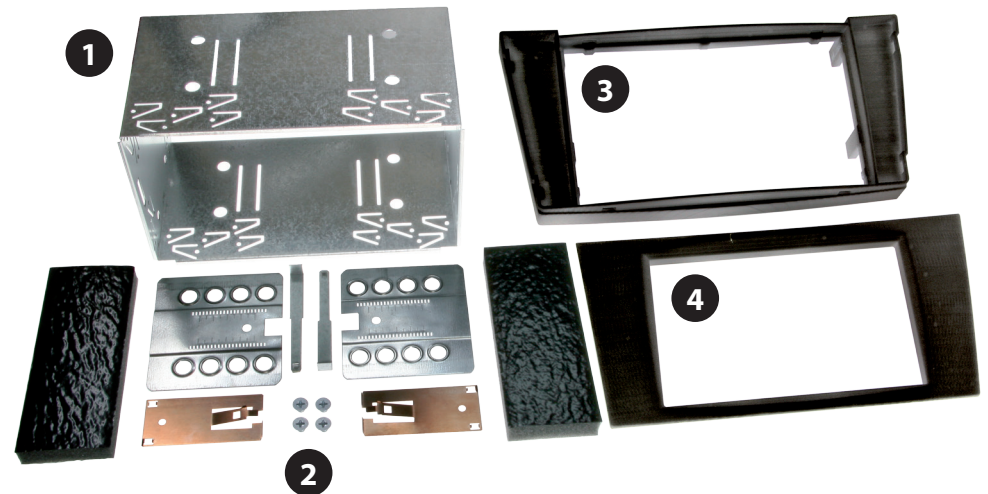

Double DIN Set contents

- (1) Metal Frame
- (2) Installation Kit
- (3) Mounting Bracket
- (4) Facia Plate

Installation Manual Double DIN Kit



1. Mercedes E-Class with OEM head unit

Facelift models 2007 upwards:
After Replacing the OEM head unit it is not possible to use the pocket underneath the radio anymore.




2. Pull up the gear shift cover


Unclip the gear shift panel and remove it



3. Open the ash tray and remove the complete ash tray unit

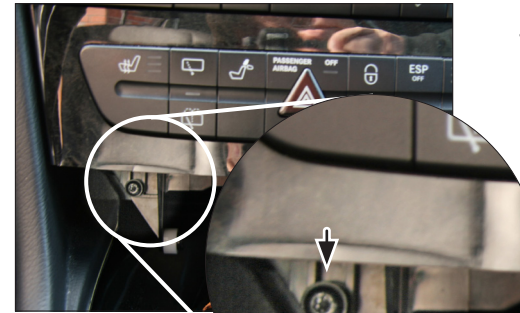

4. Remove the control unit / or CD-Changer underneath the OEM radio by removing the screws at left and right side

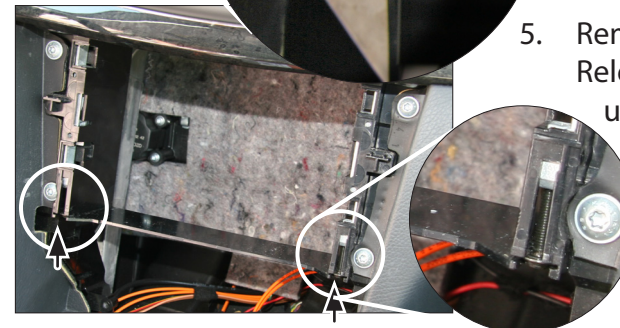

5. Remove the OEM head unit
Release the two screws (see arrows) underneath the radio first - then pull out the OEM head unit



6. Place the mounting bracket on the dashboard

Fix the mounting bracket with the two screws (see arrows) at the left and right side under the mounting bracket holder

*All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*