

CA-BC.004 Setup



1 – Remove 4 screws (A) from the bottom in order to open the camera.

2 – Change settings according to function and installation options. DIP numbers are mentioned next to each switch

3 – Close camera and secure screws.

DIP settings :

	ON	OFF
DIP 1	Front Cam	Rear Cam
DIP 2	Vertical mount	Horizontal mount
DIP 3	Night support	No night support
DIP 4	NTSC	PAL

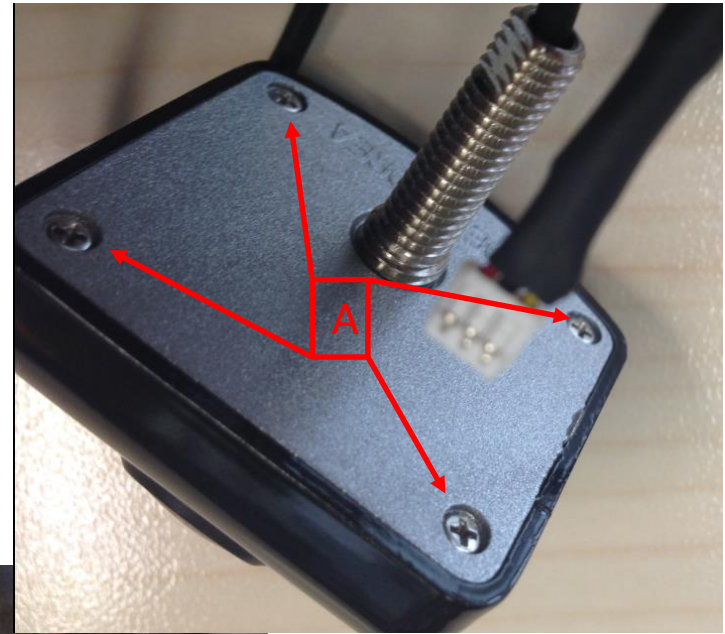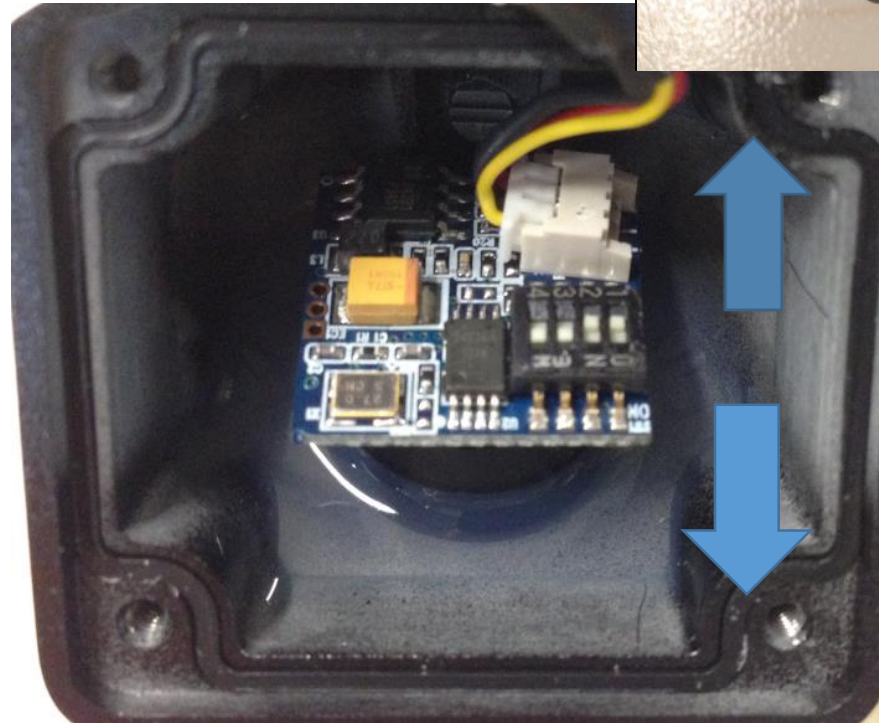

OFF

ON