

# CA-HM-KIA.016

# KIA

## RIO 2015 ->

### Compatible with double DIN devices



Place the clips saved before on the facia plate supplied, mount the air vents. If the car is equipped with Start and Stop engine, mount the button into the appropriate hole, otherwise install the cap with the two supplied screws. The image shows the final result.



Double DIN Kit contents

Facia Plate  
Mounting Brackets + 4 screws  
Cap + 2 screws


11/2013 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.


# Installation Manual Double DIN Kit




Remove the original panel, unmount the air vents; If the car is equipped with Start and Stop engine, unmount the button.

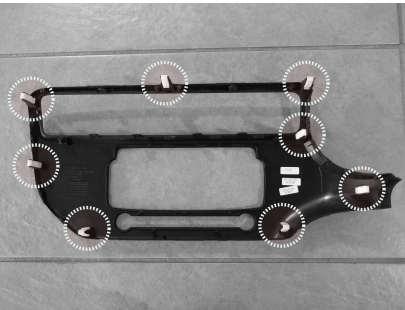

Remove and save the clips from the original panel as shown in the picture.

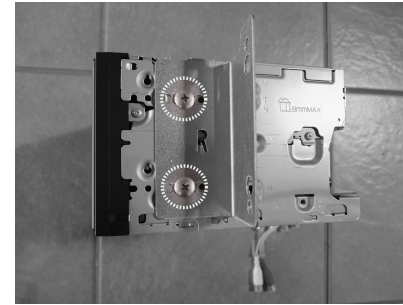

Take the left and right bracket and mount them on the aftermarket radio each with the 2 supplied screws .

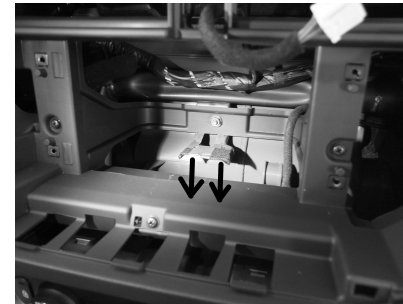

Before insert the radio pull down the internal bracket of the radio tunnel as shown in the picture.



Connect all cables, verify the proper functioning of the system and insert the radio unit into the housing. Fix it with screws saved before, as shown in the picture.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.