

Steering wheel control interface installation kit for:


# SSANGYONG

Model: Rexton only for vehicles with dual camera

Year: 2016>

Kit content: SWC Resistive interface  
wiring harness  
camera adapter  
voltage stabilizer  
radio adapter(\*) if included


Customer code:

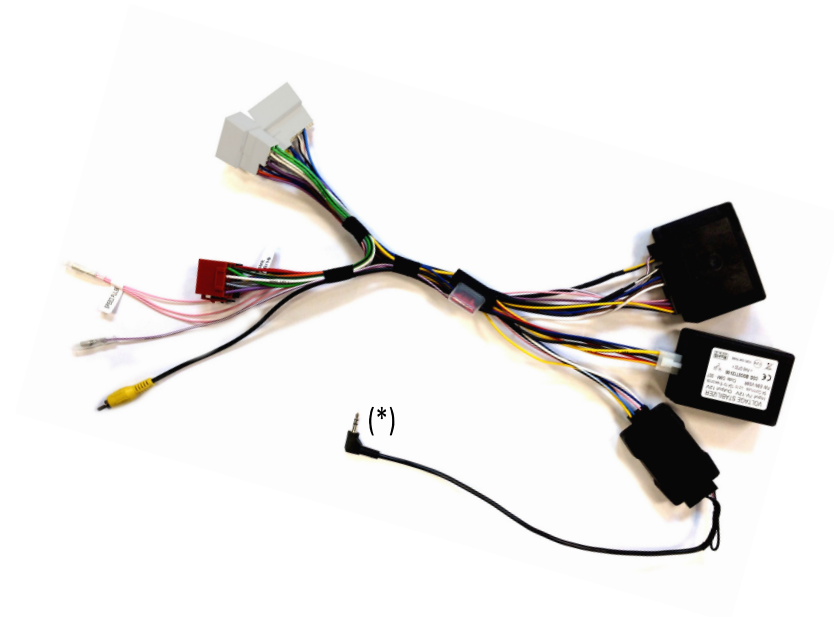

## INSTALLATION MANUAL

All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.  
10/2016 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.RO

All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.  
10/2016 ALL RIGHTS RESERVED. Technical changes possible. No liability for misprints.

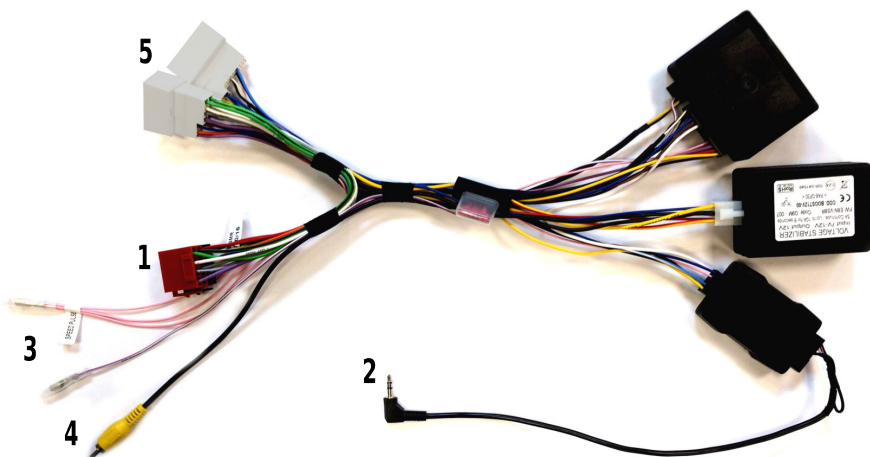

**ATTENTION!**

**In order to prevent ESD damage, the WHEEL REMOTE JACK must be connected before plugging in the connectors on car side.**

**Connect cables to the radio side as follow:**

- 1- to ISO CONNECTORS (black and red housings)
- 2- to WIRED REMOTE SOCKET (NOTE: do not connect to microphone socket)
- 3- to SERVICES (if required); function is marked on the wire:
  - Pink - Speed
  - Violet/White - Reverse
- 4- to CAMERA CONNECTOR

**Connect cables to the car side as follow:**

- 5- to CAR CONNECTOR



The steering wheel buttons perform the following functions (if supported by the radio):

- 1- Volume +
- 2- Volume -
- 3- Short Press ( <0,5 Secs ) = Mute  
Long Press ( >0,5 Secs ) = Reject incoming call \*
- 4- Seek down
- 5- Source
- 6- Seek up
- 7- Short Press ( <0,5 Secs ) = Accept incoming call  
Long Press ( >0,5 Secs ) = Voice \*
- 8- Front camera \*\*

\* NOTE: depending on the radio model, the activation time of this function could take up to 3 seconds.

\*\* NOTE: due to safety reasons, the front camera is available only at low speed.

cut along the dotted line - copy for the vehicle owner