

NavGate EVO Vehicle Adapter – Software Update Instructions

REMARKS:


- ✓ If you have any difficulty carrying out these instructions, please contact Pioneer Customer Support. Once upgraded to this version, it is not possible to downgrade to a lower version.
- ✓ Please download and print these instructions before downloading and installing the firmware update. It is important that you complete all steps correctly and in the order described below.
- ✓ Never turn your unit off, eject the USB storage device while the firmware is being updated.
- ✓ You can only update the firmware when the vehicle is stopped and the parking brake is engaged.
- ✓ In order to perform this update, the following items are needed:
 - Pioneer AVIC-EVO model
 - A USB storage device, storage device requirements:
 - 2 GB or larger in capacity, formatted to FAT32
 - Should be blank (should not contain any files)

A. Displaying the current Vehicle Adapter software version

Check whether the firmware of your vehicle adapter needs to be updated by checking the version number of the firmware.

1. Press the CAR button to display the Vehicle Information screen.
2. Touch [Menu] to display the Configuration Menu
3. Touch [Version]
4. Check the last digits from the MCU version

If the version is **4.08** or higher, it is not necessary to update the software. If the version number is lower than **4.08**, it is necessary to update the software. Please continue to Step B.

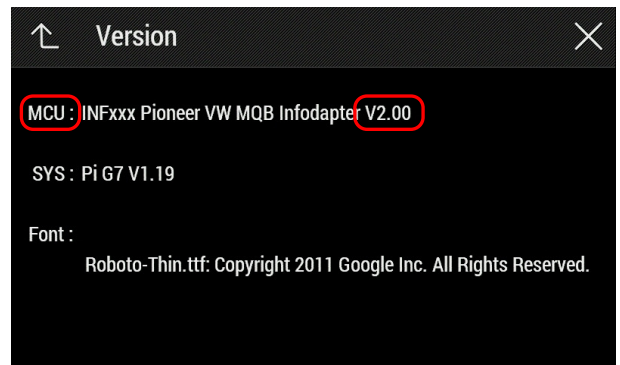

B. Downloading the Firmware Update Files from Pioneer's website

NOTE: If you have any difficulty performing these instructions, please contact Pioneer Customer Support. Once upgraded to this version, it is not possible to downgrade to a lower version.

1. Download the update file – "**AVIC-EVO-ADAPTER_Ver408.zip**" – from the website to a folder on your computer.
2. Double click the ZIP file to open it.
3. Extract and save the file "**G7 RGB Pioneer v4_08_R136.flsh**" to the root (top) folder of your empty USB device.

C. Updating the adapter software

IMPORTANT

- ✓ Ensure that the update file is located within the root (top) folder of your USB storage device. There should be no other files on the USB storage device.
- ✓ DO NOT turn off the system's power or remove the USB storage device while the firmware is being updated.
- ✓ You can only update the firmware when the vehicle is stopped and the handbrake is engaged.

Procedure:

1. connect the USB storage device to the product (refer to "*Plugging and unplugging a USB storage device*" on page 5 of the instruction manual)
2. Display the "System" setting screen (refer to "*Displaying the System setting screen*" on page 52 of the instruction manual)
3. Touch [System Information].
4. Touch [Vehicle Adapter Software Update]
5. Touch [Start] to start the update
6. Follow the on-screen instructions to finish updating the firmware.

If an error message appears on the screen, press any key displayed and perform the above steps again.

Contact Information

Pioneer Customer Support Center
<http://www.pioneer.eu>

Copyright(c) 2017 Pioneer Corporation