

9. Attach mounting frames to double DIN head unit  
Position of copper bezels depends on head unit  
Connect all required circuit points  
Push double DIN head unit into metal frame



10. Mount top panel with hazard light switch to double DIN facia plate



11. Place facia plate



12. Re-install everything in reverse order to finish installation

**Pioneer**

**Installation Manual**

- |                           |             |                 |
|---------------------------|-------------|-----------------|
| • Peugeot 308 09/2007->   | colour      | part-no.        |
| • Peugeot 308CC 03/2009-> |             |                 |
| • Peugeot RCZ 04/2010->   | piano black | CA-HM-PSA.001BP |

Compatible with these double DIN devices


**Pioneer Double-DIN Navigation**




- (1) facia plate
- (2) metal frame



1. Remove lower tray under OEM head unit

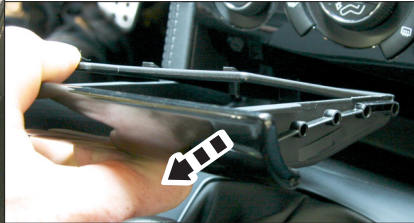

2. Remove rubber inlay

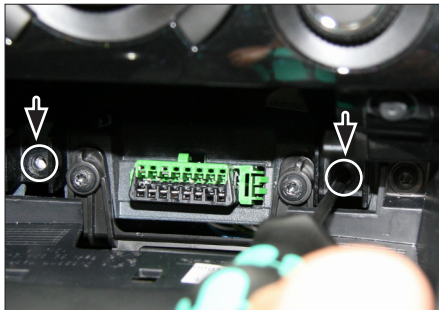


3. Remove screws



4. Remove panel




5. Remove OEM head unit

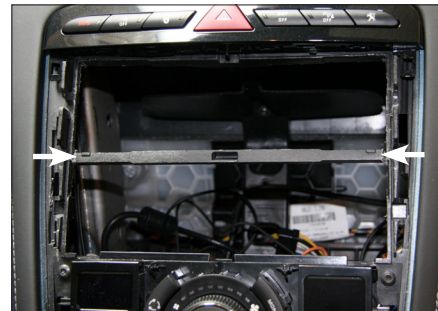

6. Cut away middle bar to clear space for double DIN head unit



7. Remove top panel  
Remove buttons

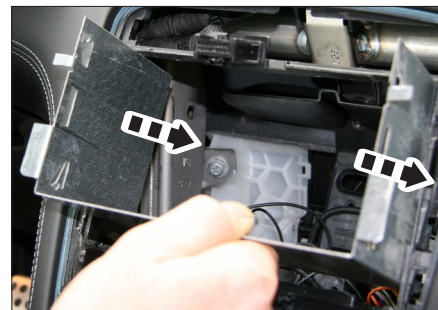

8. Mount metal frame to dash board

*All installation work must be performed by a qualified professional installer only.  
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.*